



Thermory's thermally stabilised timbers offer a range of natural or pre-finished, ready to install, cladding and lining solutions. Featuring spruce and pine ranges that are responsibly sourced from sustainably grown plantation timbers. These timbers are thermally modified using heat and steam, to produce a durable, high performing product range that carries a Class 1 or Class 2 durability rating to perform for decades in Australian conditions.

Thermory modifies the timber for increased durability and dimensional stability in a range of natural and prefinished, ready to install exterior cladding and interior lining solutions.

Spruce Cladding Intense: Drift Black Pearl C26



Thermory® cladding and lining in a Drift finish offers the rustic look of reclaimed timber, with the performance of a thermally modified timber product. Ideal for a weathered or country design aesthetic, Black Pearl offers a gently worn grey timber tone. Sourced from sustainably managed plantations, the Drift range delivers exceptional durability and dimensional stability to meet the demands of Australian conditions.

Texture

Drift

Grade

Class 1 Durability.
Thermally Stabilised Timber.

Colour

Soft Grey tones


Board Lengths

4100, 4500, 4800, 5100 and 5400

Size (mm)


186 x 19

C26 Profile:

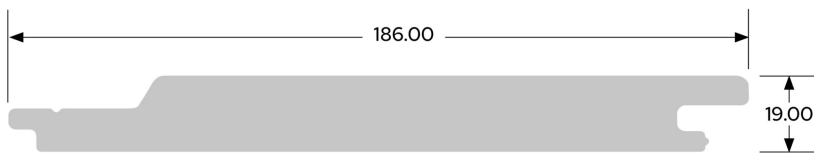

■ C26: 186 x 19 / cover: 169mm

Corner thermo - spruce CP3



■ 42x42


One universal profile for indoor and outdoor usage. Boards with straight-cut ends can be installed without exposing the endgrain.



CLASS 1



Durability
Improved Durability and rot resistance



Stability
Enhanced dimensional stability in changing weather conditions



Chemical-Free
Thermal modification process is entirely natural