



Thermory's thermally stabilised timbers offer a range of natural or pre-finished, ready to install, cladding and lining solutions. Featuring spruce and pine ranges that are responsibly sourced from sustainably grown plantation timbers. These timbers are thermally modified using heat and steam, to produce a durable, high performing product range that carries a Class 1 durability rating to perform for decades in Australian conditions.

Thermory modifies the timber for increased durability and dimensional stability in a range of natural and prefinished, ready to install exterior cladding and interior lining solutions.

Spruce Cladding Intense: Drift Sandy Pearl C15



Thermory® cladding and lining in a Drift texture offers the rustic look of reclaimed timber. Thermory's spruce cladding is FSC certified and responsibly sourced from plantation timbers. Ideal for a coastal aesthetic, this blonde timber features a lime wash and delivers the performance of a thermally modified timber product, offering durability and dimensional stability.

Texture
Drift


Grade
Class 1 Durability.
Thermally Stabilised Timber.

Colour
Sandy tones,
lime wash

Board Lengths
5100 and 5400mm


Size (mm)
186 x 20

C15 Profile:

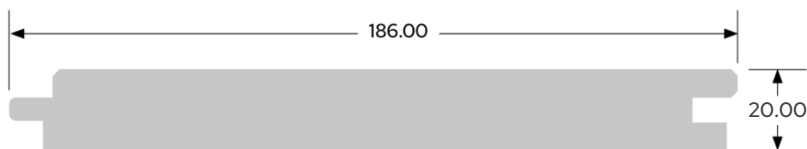

C24: 186 x 20 / cover: 175mm

Corner thermo - spruce CP3



One universal profile for indoor and outdoor usage. Boards with straight-cut ends can be installed without exposing the endgrain.

42x42



CLASS 1



Durability
Improved Durability and rot resistance



Stability
Enhanced dimensional stability in changing weather conditions



Chemical-Free
Thermal modification process is entirely natural

Call 1300 399 922
or email info@citytimber.com.au
1400 Centre Rd, Clayton South 3169
citytimber.com.au

