



Thermory's thermally stabilised timbers offer a range of natural or pre-finished, ready to install, cladding and lining solutions. Featuring spruce and pine ranges that are responsibly sourced from sustainably grown plantation timbers. These timbers are thermally modified using heat and steam, to produce a durable, high performing product range that carries a Class 2 durability rating to perform for decades in Australian conditions.

Thermory modifies the timber for increased durability and dimensional stability in a range of natural and prefinished, ready to install exterior cladding and interior lining solutions.

Pine Screening Intense: Natural D4



Thermory® pine screening products are FSC certified, thermally modified timbers. Thermory's modification process uses heat and steam to enhance the properties of timber by strengthening the wood's molecular structure to create a resilient timber screening range. With a Class 2 durability rating these screens are ideal for use in the Australian climate, delivering on both aesthetics and long-term performance. Available in pine, for a light timber tone that features distinctive knots, this range is ideal for outdoor screening, feature walls and timber architectural elements.

Texture
Smooth


Grade
Class 2 Durability.
Thermally Stabilised Timber.

Colour
Blonde tones


Board Lengths
4800 and 5100mm

Size (mm)
116 x 20
68 x 42
42 x 42

D4 Decking & Screening Profiles:

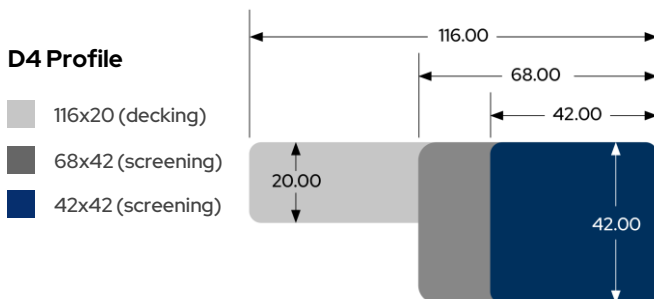

Corner thermo - spruce CP3



One universal profile for indoor and outdoor usage. Boards with straight-cut ends can be installed without exposing the endgrain.



CLASS 2



Durability
Improved Durability and rot resistance



Stability
Enhanced dimensional stability in changing weather conditions



Chemical-Free
Thermal modification process is entirely natural

Call 1300 399 922
or email info@citytimber.com.au
1400 Centre Rd, Clayton South 3169
citytimber.com.au

