



Thermory's thermally stabilised timbers offer a range of natural or pre-finished, ready to install, cladding and lining solutions. Featuring spruce and pine ranges that are responsibly sourced from sustainably grown plantation timbers. These timbers are thermally modified using heat and steam, to produce a durable, high performing product range that carries a Class 1 durability rating to perform for decades in Australian conditions.

Thermory modifies the timber for increased durability and dimensional stability in a range of natural and prefinished, ready to install exterior cladding and interior lining solutions.

## Spruce Cladding Intense: Natural C15



Thermory® Spruce cladding and lining products are FSC certified and responsibly sourced from plantation timbers. These thermally modified timbers are ideal for use in Australian conditions, delivering on both aesthetics and long term performance. Using industry leading modification techniques, the timbers are exposed to heat and steam, to strengthen the wood's molecular structure. Thermory® products offer exceptional durability and dimensional stability for interior or exterior applications.

### Texture

Natural Brushed

### Grade

Class 1 Durability.  
Thermally Stabilised Timber.

### Colour

Golden tones


### Board Lengths

3600 – 5400mm

### Size (mm)


186 x 20

### C15 Profile:

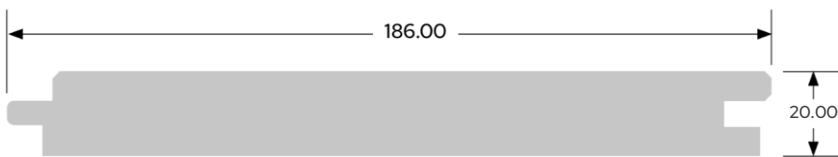

C15: 186 x 20 / cover: 175mm

### Corner thermo - spruce CP3



One universal profile for indoor and outdoor usage. Boards with straight-cut ends can be installed without exposing the endgrain.

42x42



CLASS 1



**Durability**  
Improved Durability and rot resistance



**Stability**  
Enhanced dimensional stability in changing weather conditions



**Chemical-Free**  
Thermal modification process is entirely natural

Call 1300 399 922  
or email [info@citytimber.com.au](mailto:info@citytimber.com.au)

1400 Centre Rd, Clayton South 3169  
[citytimber.com.au](http://citytimber.com.au)

