



Thermory's thermally stabilised timbers offer a range of natural or pre-finished, ready to install, cladding and lining solutions. Featuring spruce and pine ranges that are responsibly sourced from sustainably grown plantation timbers. These timbers are thermally modified using heat and steam, to produce a durable, high performing product range that carries a Class 2 durability rating to perform for decades in Australian conditions.

Thermory modifies the timber for increased durability and dimensional stability in a range of natural and prefinished, ready to install exterior cladding and interior lining solutions.

Pine Cladding Intense: Natural C4J & C7J




When considering high-quality materials, Thermory® Pine cladding is an excellent choice. It has been thermally modified to achieve a superb level of rot defense, boosted durability and longevity. The process strengthens the timber's molecular structure, preventing buckling wood and highlighting knotted patterns without the use of chemicals. It is low maintenance, easy to set up and ready to build with accessories such as installation clips or a clad and clip option is available to fit numerous design criteria, create stable facades and stellar eco-friendly spaces.

Left Main & Inset Image: C4J. Right Main & Inset Image: C7J.

Texture	Grade	Colour	Species	Size (mm)
Smooth	Class 2 Durability Thermally Stabilised Timber	Golden-Brown tones	Scots Pine	65 x 20 42 x 42

C4J & C7J Profiles:

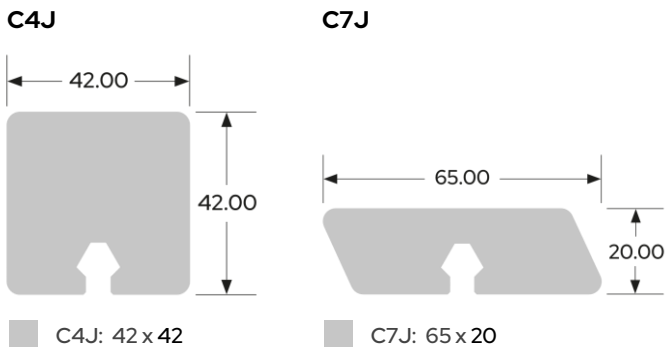

Product Suggestions & Accessories:

CLAD1-65

Battens with factory-positioned clips for a more easier and faster cladding, screening and decking installation process.

CLAD1-65: 68 x 26
Required: 1 pc / m²



JUAN1

Single clips available.

JUAN1: 1 x 1
Required: 2 pcs / m²



CLASS 2



Durability
Improved Durability and rot resistance



Stability
Enhanced dimensional stability in changing weather conditions



Chemical-Free
Thermal modification process is entirely natural