




Thermory's thermally stabilised timbers offer a range of natural or pre-finished, ready to install, cladding and lining solutions. Featuring spruce and pine ranges that are responsibly sourced from sustainably grown plantation timbers. These timbers are thermally modified using heat and steam, to produce a durable, high performing product range that carries a Class 2 durability rating to perform for decades in Australian conditions.

Thermory modifies the timber for increased durability and dimensional stability in a range of natural and prefinished, ready to install exterior cladding and interior lining solutions.

Pine Cladding Intense: Natural C4J & C7J

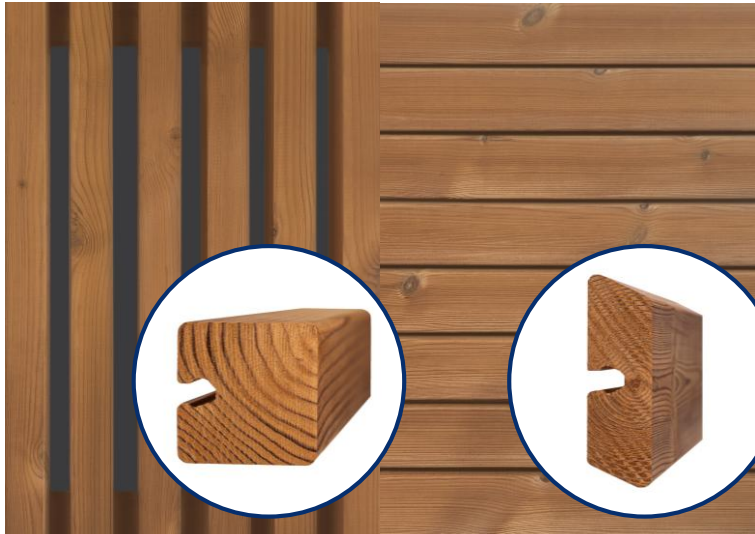


When considering high-quality materials, Thermory® Pine cladding is an excellent choice. It has been thermally modified to achieve a superb level of rot defense, boosted durability and longevity. The process strengthens the timber's molecular structure, preventing buckling wood and highlighting knotted patterns without the use of chemicals. It is low maintenance, easy to set up and ready to build with accessories such as installation clips or a clad and clip option is available to fit numerous design criteria, create stable facades and stellar eco-friendly spaces.

Left Main & Inset Image: C4J. Right Main & Inset Image: C7J.

Texture	Grade	Colour	Species	Size (mm)
Smooth	Class 2 Durability Thermally Stabilised Timber	Golden-Brown tones	Scots Pine	65 x 20 42 x 42

C4J & C7J Profiles:

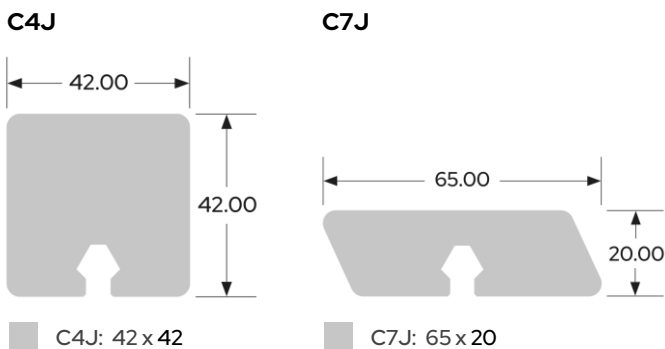

Product Suggestions & Accessories:

CLAD1-65

Battens with factory-positioned clips for a more easier and faster cladding, screening and decking installation process.

CLAD1-65: 68 x 26
Required: 1 pc / m²



JUAN1

Single clips available.

JUAN1: 1 x 1
Required: 2 pcs / m²



CLASS 2



Durability
Improved Durability and rot resistance



Stability
Enhanced dimensional stability in changing weather conditions




Chemical-Free
Thermal modification process is entirely natural

Call 1300 399 922
or email info@citytimber.com.au

1400 Centre Rd, Clayton South 3169
citytimber.com.au





DECLARATION OF PERFORMANCE

The undersigned, representing
Thermory AS (Lõõtsa 1a, Tallinn, Harju County, Estonia)
and the manufacturing plant in Loo, Harju County, Estonia
hereby declares that the

THERMALLY MODIFIED SOLID WOOD PINE CLADDING AND PANELING WITHOUT SURFACE COATING

is in conformity with the provisions of the EC Regulation No 305/2011
Construction Product Regulation system of assessment and verification of
constancy of performance: System 3 and is in accordance with the requirements of
EN 14915:2013

„Solid wood panelling and cladding – Characteristics,
evaluation of conformity and marking“
Initial type testing report No.01_THERMORY_EN14915

CHARACTERISTIC	PERFORMANCE DECLARATION
Species	Scots pine (<i>Pinus sylvestris</i>)
Intended use	For exterior and interior use
Density and range of thickness	435 kg/m ³ , 18–42 mm
Reaction to fire	D-s2, d0 (tested according to standard EN14915:2013)
Emission of formaldehyde	E1
Content of pentachlorophenol	NPD
Release of other dangerous substances	NPD
Water vapor permeability	NPD
Thermal resistance	0,12 W/(m K)
Sound absorption	NPD
Biological durability (according to CEN/TS 15083-1:2005)	Class 2, when thermally modified (215 °C, Intense)



Liivi Viin
CQO
Tallinn 08.04.2022