



Iron Bark

The Iron Bark tree, born from Australia's harsh environment, has been revered in this land for thousands of years and always known for its natural beauty, strength and durability. Today Stagwood produce a full range of precision milled Iron Bark profiles to suit residential, commercial and government building applications.

Grade: Organic. Stagwood Organic celebrates the qualities by offering a complete balanced natural selection of the tree including very straight to wavy dense grains and features.

Tone: Soft brown shades to rich chocolate tones & deep reds with some grey undertones.

Texture: N/A

Botanical names: Red Iron Bark – Eucalyptus Crebra and Fibrosa.
Grey Iron Bark – Eucalyptus Drepanophylla.

Durability: Class 1 High (above ground) 40+ years.

Strength Group: Grey IBK – Very High (SD1 Seasoned).
Red IBK – High (SD3 Seasoned).

Hardness: Grey IBK – Very Hard (Janka 16). Red IBK – Very Hard (Janka 11.9).

Density: Grey IBK – 1106 to 1170 kg/m³.

BAL Rating AS3959-2009: BAL 19-29.

Termites: Resistant.


Before fixing Stagwood claddings, all wall openings, vertical and horizontal joints, sills, heads and corners must be weatherproofed with flashing to comply with National Construction Codes.



Stagwood (Howard Sawmill) proudly complies with the requirements of AS 4707 Chain of Custody for Forest Based Products. All information is correct at time of printing but may be subject to change. Please check with your account manager or email info@citytimber.com.au

Profiles:

Cladding (Shiplap)

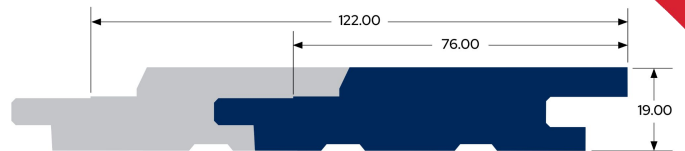


■ 122x19 ■ 76x19 Dimensions are cover size.




Wharf Cladding also available

Flooring & Overlay

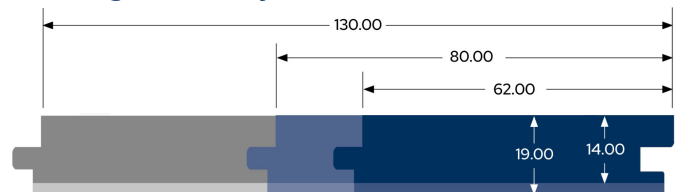


■ 130x19 ■ 80x19 ■ 62x19
■ 130x14 ■ 80x14 ■ 62x14

Linings (Shiplap & V Joint)

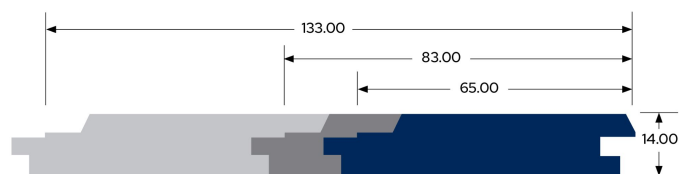

■ 133x14 ■ 83x14 ■ 65x14 Ship Lap profile shown. Dimensions are cover size.

Decking & Squares

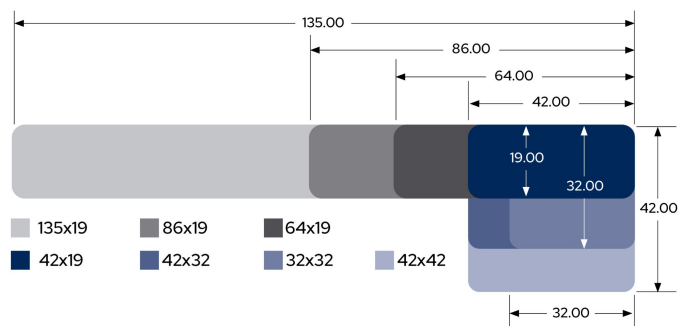

■ 135x19 ■ 86x19 ■ 64x19
■ 42x19 ■ 42x32 ■ 32x32 ■ 42x42

