





# Bespoke Hardwood Trax

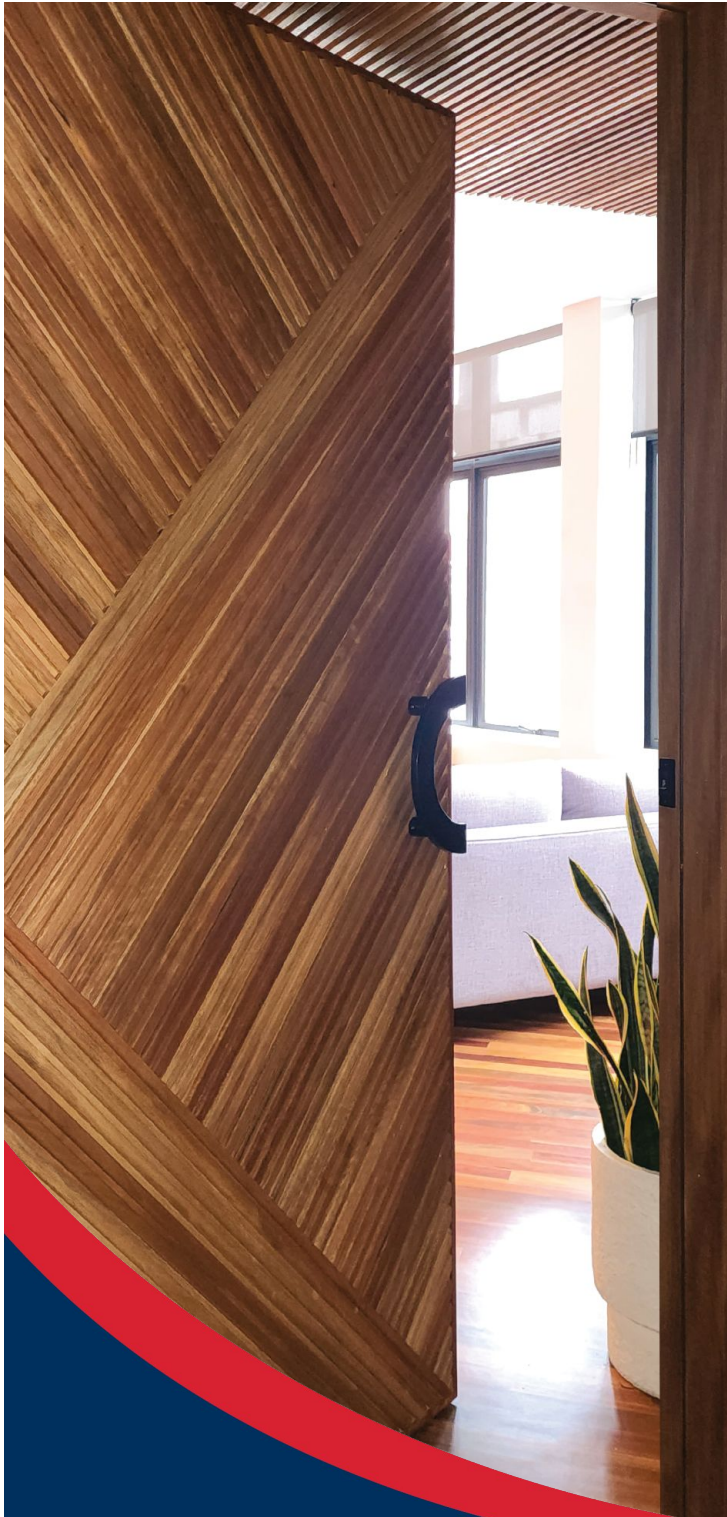

Feature walls, interior doors, ceiling linings and timber architectural details are key design elements in Australian design, buildings and spaces.

Stagwood's handcrafted Trax Profiles provide the ideal project solution. Available in premium hardwoods with rich textures, tones and natural stability to suit any architectural vision.

## Profiles:

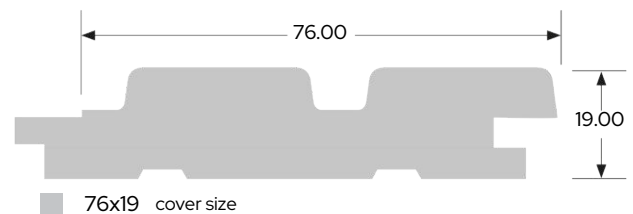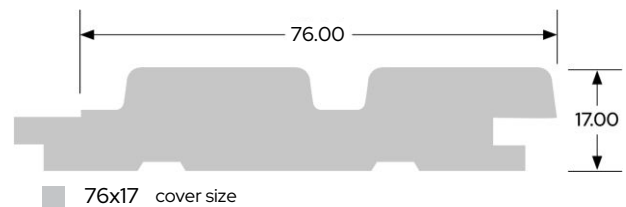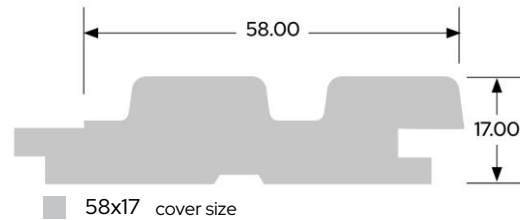

## Species:

- Spotted Gum
- Red & Grey Ironbark
- Qld Blondes
- Qld Reds
- Blackbutt




Stagwood (Howard Sawmill) proudly complies with the requirements of AS 4707 – Chain of Custody for Forest Based Products. All information is correct at time of printing but may be subject to change. Please check with your account representative or email [info@citytimber.com.au](mailto:info@citytimber.com.au)



# Installation Steps


## Concealed timber joiner details

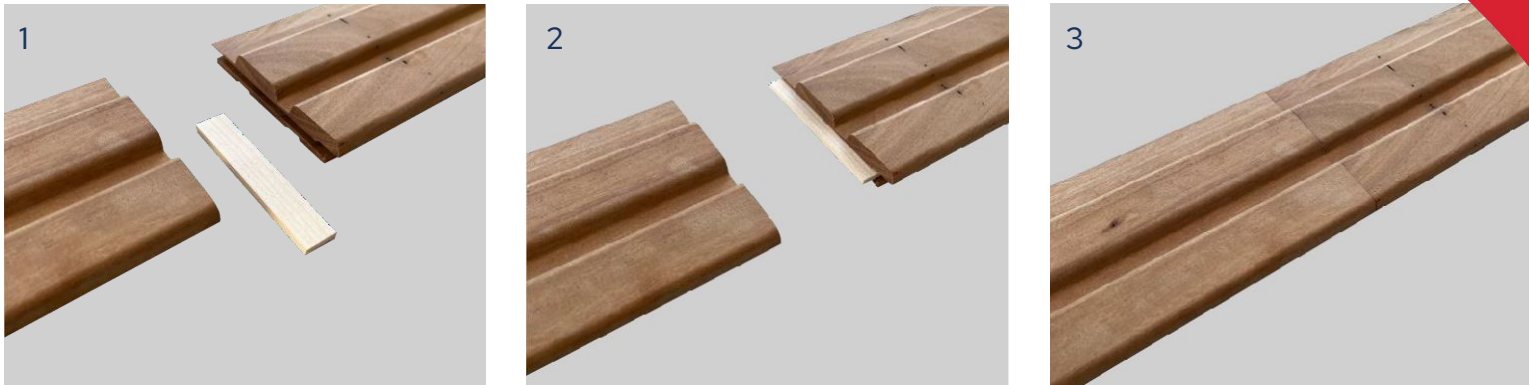

Stagwood Trax timber joiners are designed to match both Trax profiles. They make joining each length easy, creating a strong and seamless join. The concealed joiners reduce visible seams and highlight the precision-milled, dressed-all-around profiles. If the concealed timber joiner is not requiring then a square or 45° cuts are suitable alternatives.

## Secret fixing & adhesive for board lengths

1. Ensure the fixing surface is even, secure, clean and free of any obstructions.
2. For vertical or horizontal installation, the Trax should be securely fixed at recommended 450mm centre spacings.
3. Fixings should be a combined nail and adhesive technique utilising conventional Brad nail types approximately 32 x 1.6mm (16 gauge) or similar and an elastomeric wall board / timber adhesive.
4. Firstly, apply beads of adhesive to framing (or battens) sufficient for the installation of up to 5 boards at a time.
5. Locate the first Traxboard, glue and nail (face nailing may be necessary) ensuring the board is plumb and then utilise the secret nail facility with the following boards by nailing at an approximate 10° angle to conceal the fixing under the overlapping edge.
6. Insert and glue the cut timber joiner as required
  - 58mm Trax: cut joiner to 55mm
  - 76mm Trax: cut joiner to 70mm
7. As work proceeds, check that the boards are plumb and level fixing each board securely. Avoid over cramping.
8. The securing of the final board will necessitate nailing through the face. All face nailing should be punched and filled with colour tinted putty prior to finishing.
9. If using an 'adhesive only' method, support the lining until the adhesive is fully cured. Follow the recommendation of the fastener and adhesive supplier.

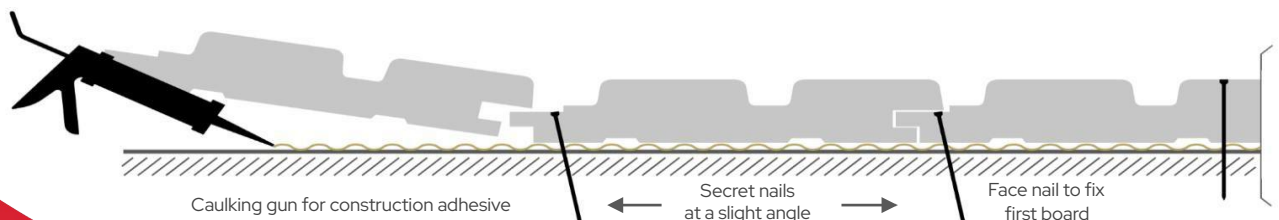

Before fixing Stagwood claddings, all wall openings, vertical and horizontal joints, sills, heads and corners must be weatherproofed with flashing to comply with National Construction Codes.

