


Thermally Modified Timber

Pine Cladding Intense: Natural C346

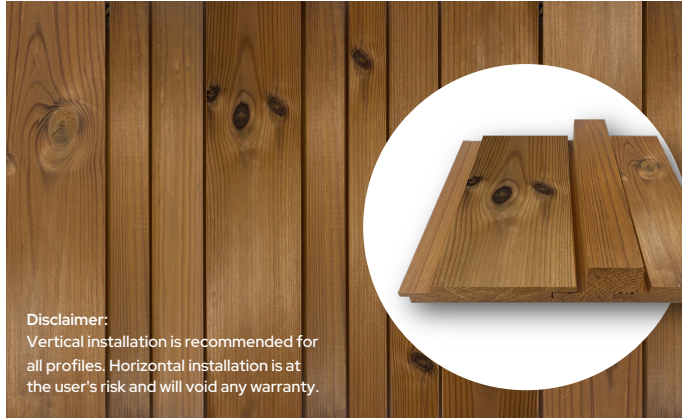

Disclaimer:
 Vertical installation is recommended for all profiles. Horizontal installation is at the user's risk and will void any warranty.


The Thermory® Pine cladding and lining range are sustainably sourced. They provide visual appeal, performs outstanding durability and demonstrates dimensional stability. Advanced modification techniques enhance the timber's molecular structure, ensuring longevity for interior and exterior use. The products offer excellent rot resistance with unique knots adding character. A Mix & Match combination of cladding with varied profiles that combine together to create a ribbed effect styled to meet a wide range of design needs.

Thermory's thermally stabilised timbers offer a range of natural or pre-finished, ready to install, cladding and lining solutions. Featuring spruce and pine ranges that are responsibly sourced from sustainably grown plantation timbers. These timbers are thermally modified using heat and steam, to produce a durable, high performing product range that carries a Class 2 durability rating to perform for decades in Australian conditions.

Thermory modifies the timber for increased durability and dimensional stability in a range of natural and prefinished, ready to install exterior cladding and interior lining solutions.

Texture: Smooth	Grade: Class 2 Durability Thermally Stabilised Timber	Colour: Golden-brown tones	Species: Scots Pine	Size (mm): 140 x 20 90 x 20 68 x 42
---------------------------	--	--------------------------------------	-------------------------------	---


C346 Profiles:

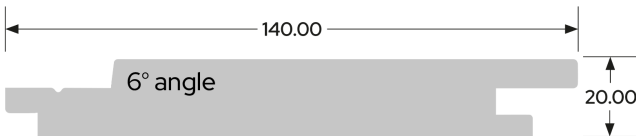

C346: 140 x 20 / cover: 121mm



C346: 68 x 42 / cover: 49mm

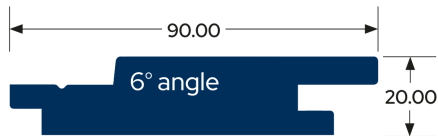

C346: 90 x 20 / cover: 71mm

Mix & Match Design Recommendation:



Durability
 Improved Durability
 and rot resistance



Stability
 Enhanced dimensional
 stability in changing
 weather conditions



Chemical-Free
 Thermal modification
 process is entirely natural




15+ YEARS
 AGAINST
 WOOD
 DECAY
 CLASS 2



PEFC
 PFCU21-31-178





DECLARATION OF PERFORMANCE

The undersigned, representing
Thermory AS (Lõõtsa 1a, Tallinn, Harju County, Estonia)
and the manufacturing plant in Loo, Harju County, Estonia
hereby declares that the

THERMALLY MODIFIED SOLID WOOD PINE CLADDING AND PANELING WITHOUT SURFACE COATING

is in conformity with the provisions of the EC Regulation No 305/2011
Construction Product Regulation system of assessment and verification of
constancy of performance: System 3 and is in accordance with the requirements of
EN 14915:2013

„Solid wood panelling and cladding – Characteristics,
evaluation of conformity and marking“
Initial type testing report No.01_THERMORY_EN14915

CHARACTERISTIC	PERFORMANCE DECLARATION
Species	Scots pine (<i>Pinus sylvestris</i>)
Intended use	For exterior and interior use
Density and range of thickness	435 kg/m ³ , 18–42 mm
Reaction to fire	D-s2, d0 (tested according to standard EN14915:2013)
Emission of formaldehyde	E1
Content of pentachlorophenol	NPD
Release of other dangerous substances	NPD
Water vapor permeability	NPD
Thermal resistance	0,12 W/(m K)
Sound absorption	NPD
Biological durability (according to CEN/TS 15083-1:2005)	Class 2, when thermally modified (215 °C, Intense)