

Wharf Sawn Face Hardwood

QLD Reds

Spotted Gum

Iron Bark

(Ship Lap profiles shown)

Forest Red Gum is a dense, durable and highly versatile species. Ideal for flooring, its attractive grain and colour palette is a favourite of architects, designers and owners alike.

Spotted Gum is a premium Australian hardwood famous for its luxury appearance and high degree of natural strength, durability and fire resistance.

The Iron Bark tree, born from Australia's harsh environment, has been revered in this land for thousands of years and always known for its natural beauty, strength and durability.

Grade: Organic.

Tone: Soft cherry tones
To deep rich burgundy.

Botanical names:
Eucalyptus Tereticornis

Durability: Class 1 High
(above ground) 40+ years

Strength Group:
Medium High (SD4 Seasoned)

Hardness: Very Hard (Janka 11.3)

Density: 1000 – 1170 Kg/m³

BAL Rating AS3959-2009:
BAL 12.5-19

Termites: Resistant

Grade: Organic.

Tone: Soft cherry tones to deep
rich burgundy.

Texture: Dense grain with a soft,
mottled effect.

Botanical names: Corymbia Citriodora,
Corymbia Henryi, Corymbia maculata
Durability: Class 1 High (above ground)
40+ years

Strength Group: High (SD2
Seasoned)

Hardness: Very Hard (Janka 10.1)

Density: 990 – 1180Kg/m³

BAL Rating AS3959-2009: BAL
12.5-29

Termites: Resistant

Grade: Organic.

Tone: Brown shades to chocolate
tones & deep reds

Botanical names: Red Iron Bark –
Eucalyptus Crebra and Fibrosa.

Durability: Class 1 High (above
ground) 40+ years

Strength Group: Grey IBK - Very
High (SD1 Seasoned). Red IBK - High
(SD3 Seasoned).


Hardness: Grey - Very Hard (Janka
16). Red - Very Hard (Janka 11.9)

Density: Grey IBK - 1106 - 1170Kg/m³.

BAL Rating AS3959-2009:
BAL 19-29


Termites: Resistant

Cladding Profile (Shiplap)

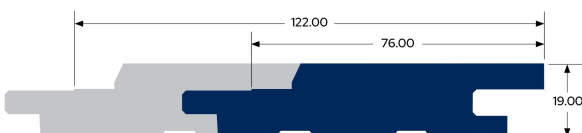

■ 122x19 ■ 76x19 Dimensions are cover size.

Decking, Wharf & Squares

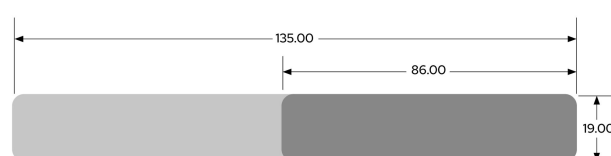

■ 135x19 ■ 86x19



Scan to download
document



Stagwood (Howard Sawmill) proudly complies with the requirements of AS 4707 – Chain of Custody for Forest Based Products. All information is correct at time of printing but may be subject to change. Please check with your account representative or email info@citytimber.com.au

Call 1300 399 922 or email info@citytimber.com.au

1400 Centre Rd, Clayton South Vic 3169
citytimber.com.au

